HOBS TECHNICAL INFORMATION & DRAWINGS

MODEL NUMBER	DTi1041X	DTi1032X	DTG1118X	DTE1168X
Frame	Stainless trim	Stainless trim	Stainless trim	Stainless trim
Width (cm)	38	38	38	38
ZONE SPECIFICATIONS				
Zone type	Induction	Induction wok	Gas on glass	Teppan Yaki
Number of cooking zones	1 x zoneless	1	1	1
Zone power (kW)	4.6	3.0	6.1	2.5
Front specification	40 x 30cm	Full	Triple crown	
HOB FEATURES				
Number of power levels	15	9	n/a	n/a
Control type	TFT touchscreen	Touch control	Rotary	Rotary
Control position	Front	Front	Front	Front
Pan supports	n/a	n/a	Cast iron	n/a
Integrated ignition	n/a	n/a	•	n/a
Electronic timer	1 x 99 minutes	1 x 99 minutes		
SAFETY FEATURES				
Flame failure safety cut off	n/a	n/a	•	n/a
Child lock	•	•	n/a	n/a
Automatic pan detection	•	•	n/a	n/a
Anti-overflow safety	•	•	n/a	n/a
Auto-safety shut off	•	•	n/a	n/a
Residual heat indicators	•	•	n/a	n/a
Anti-overheat	•	•	n/a	
Small object detection	•	•	n/a	
Control lock	•	•	n/a	
Cleaning lock	•		n/a	
Electronic power monitor	•		n/a	
DIMENSIONS				
Built-in aperture H / W / D (mm)	59 x 560 x 410	117 x 340 x 490	51 x 340 x 490	82 x 340 x 490
Overall H / W / D (mm)	68 x 650 x 520	117 x 380 x 520	66 x 380 x 520	116 x 380 x 520
Packed H / W / D (mm)	230 x 750 x 600	270 x 420 x 670	210 x 480 x 600	180 x 450 x 580
Net weight (kg)	14	16	7	11.6
Gross weight (kg)	15	17	8	12.6
ELECTRICAL CONNECTION				
Electric Power (kW)	7.2	3	6.1	2.5
Supplied with cable	Yes	Yes	Yes	Yes
Electrical connection	220-240 / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz
Fuse rating (amps)	32	16	13	13

DTi**1041**X

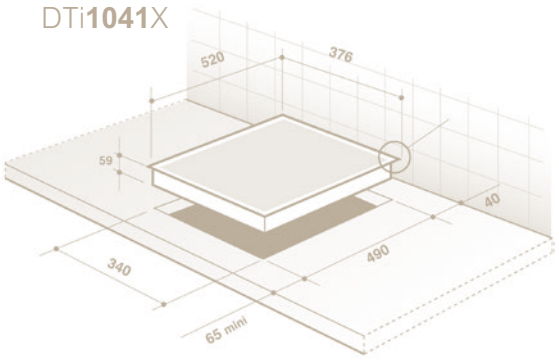

DTi**1032**X

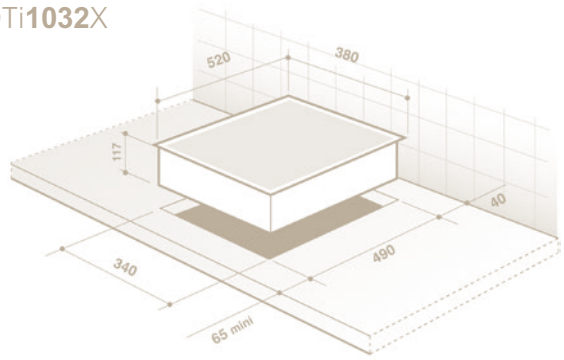

DTG**1118**X

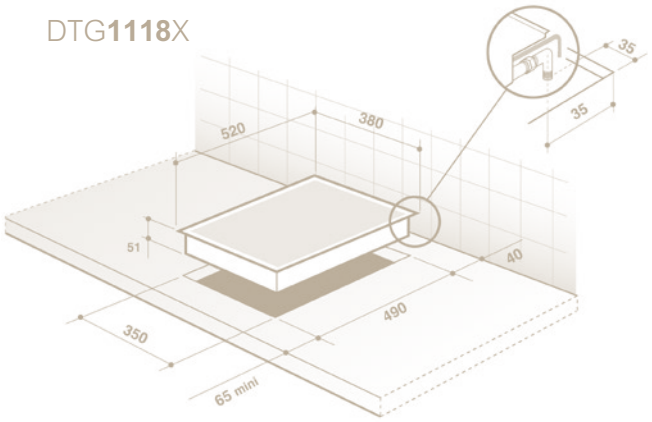

DTE**1168**X

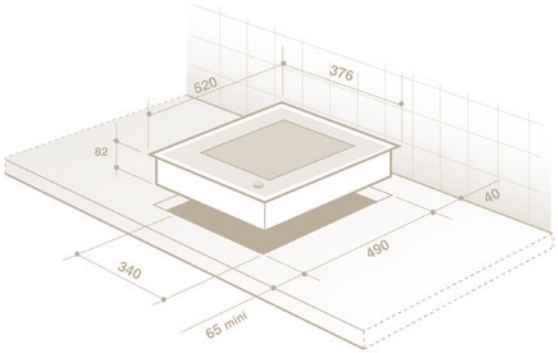

Please refer to page 100 for ventilation information

* Note: When installing modular hobs side by side, a distance of 75mm between hob apertures will increase the strength of the work top.